


NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
 2 IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
 3 HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.
 4 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.05 μm MIN	5	PS	BLACK			
		SMT LEAD: GOLD 0.05 μm MIN						
		UNDERPLATING: NICKEL 1 μm MIN						
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 10 : 1	COUNT △	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	08.12.15	DRAWING NO. EDC3-319957-01				
		CHECKED : TS. MIYAZAKI	08.12.15	PART NO. DF40HC(2.5)-30DS-0.4V(70)				
		DESIGNED : TK. SUZUKI	08.12.15	CODE NO. CL684-4127-6-70				
		DRAWN : TK. SUZUKI	08.12.15					

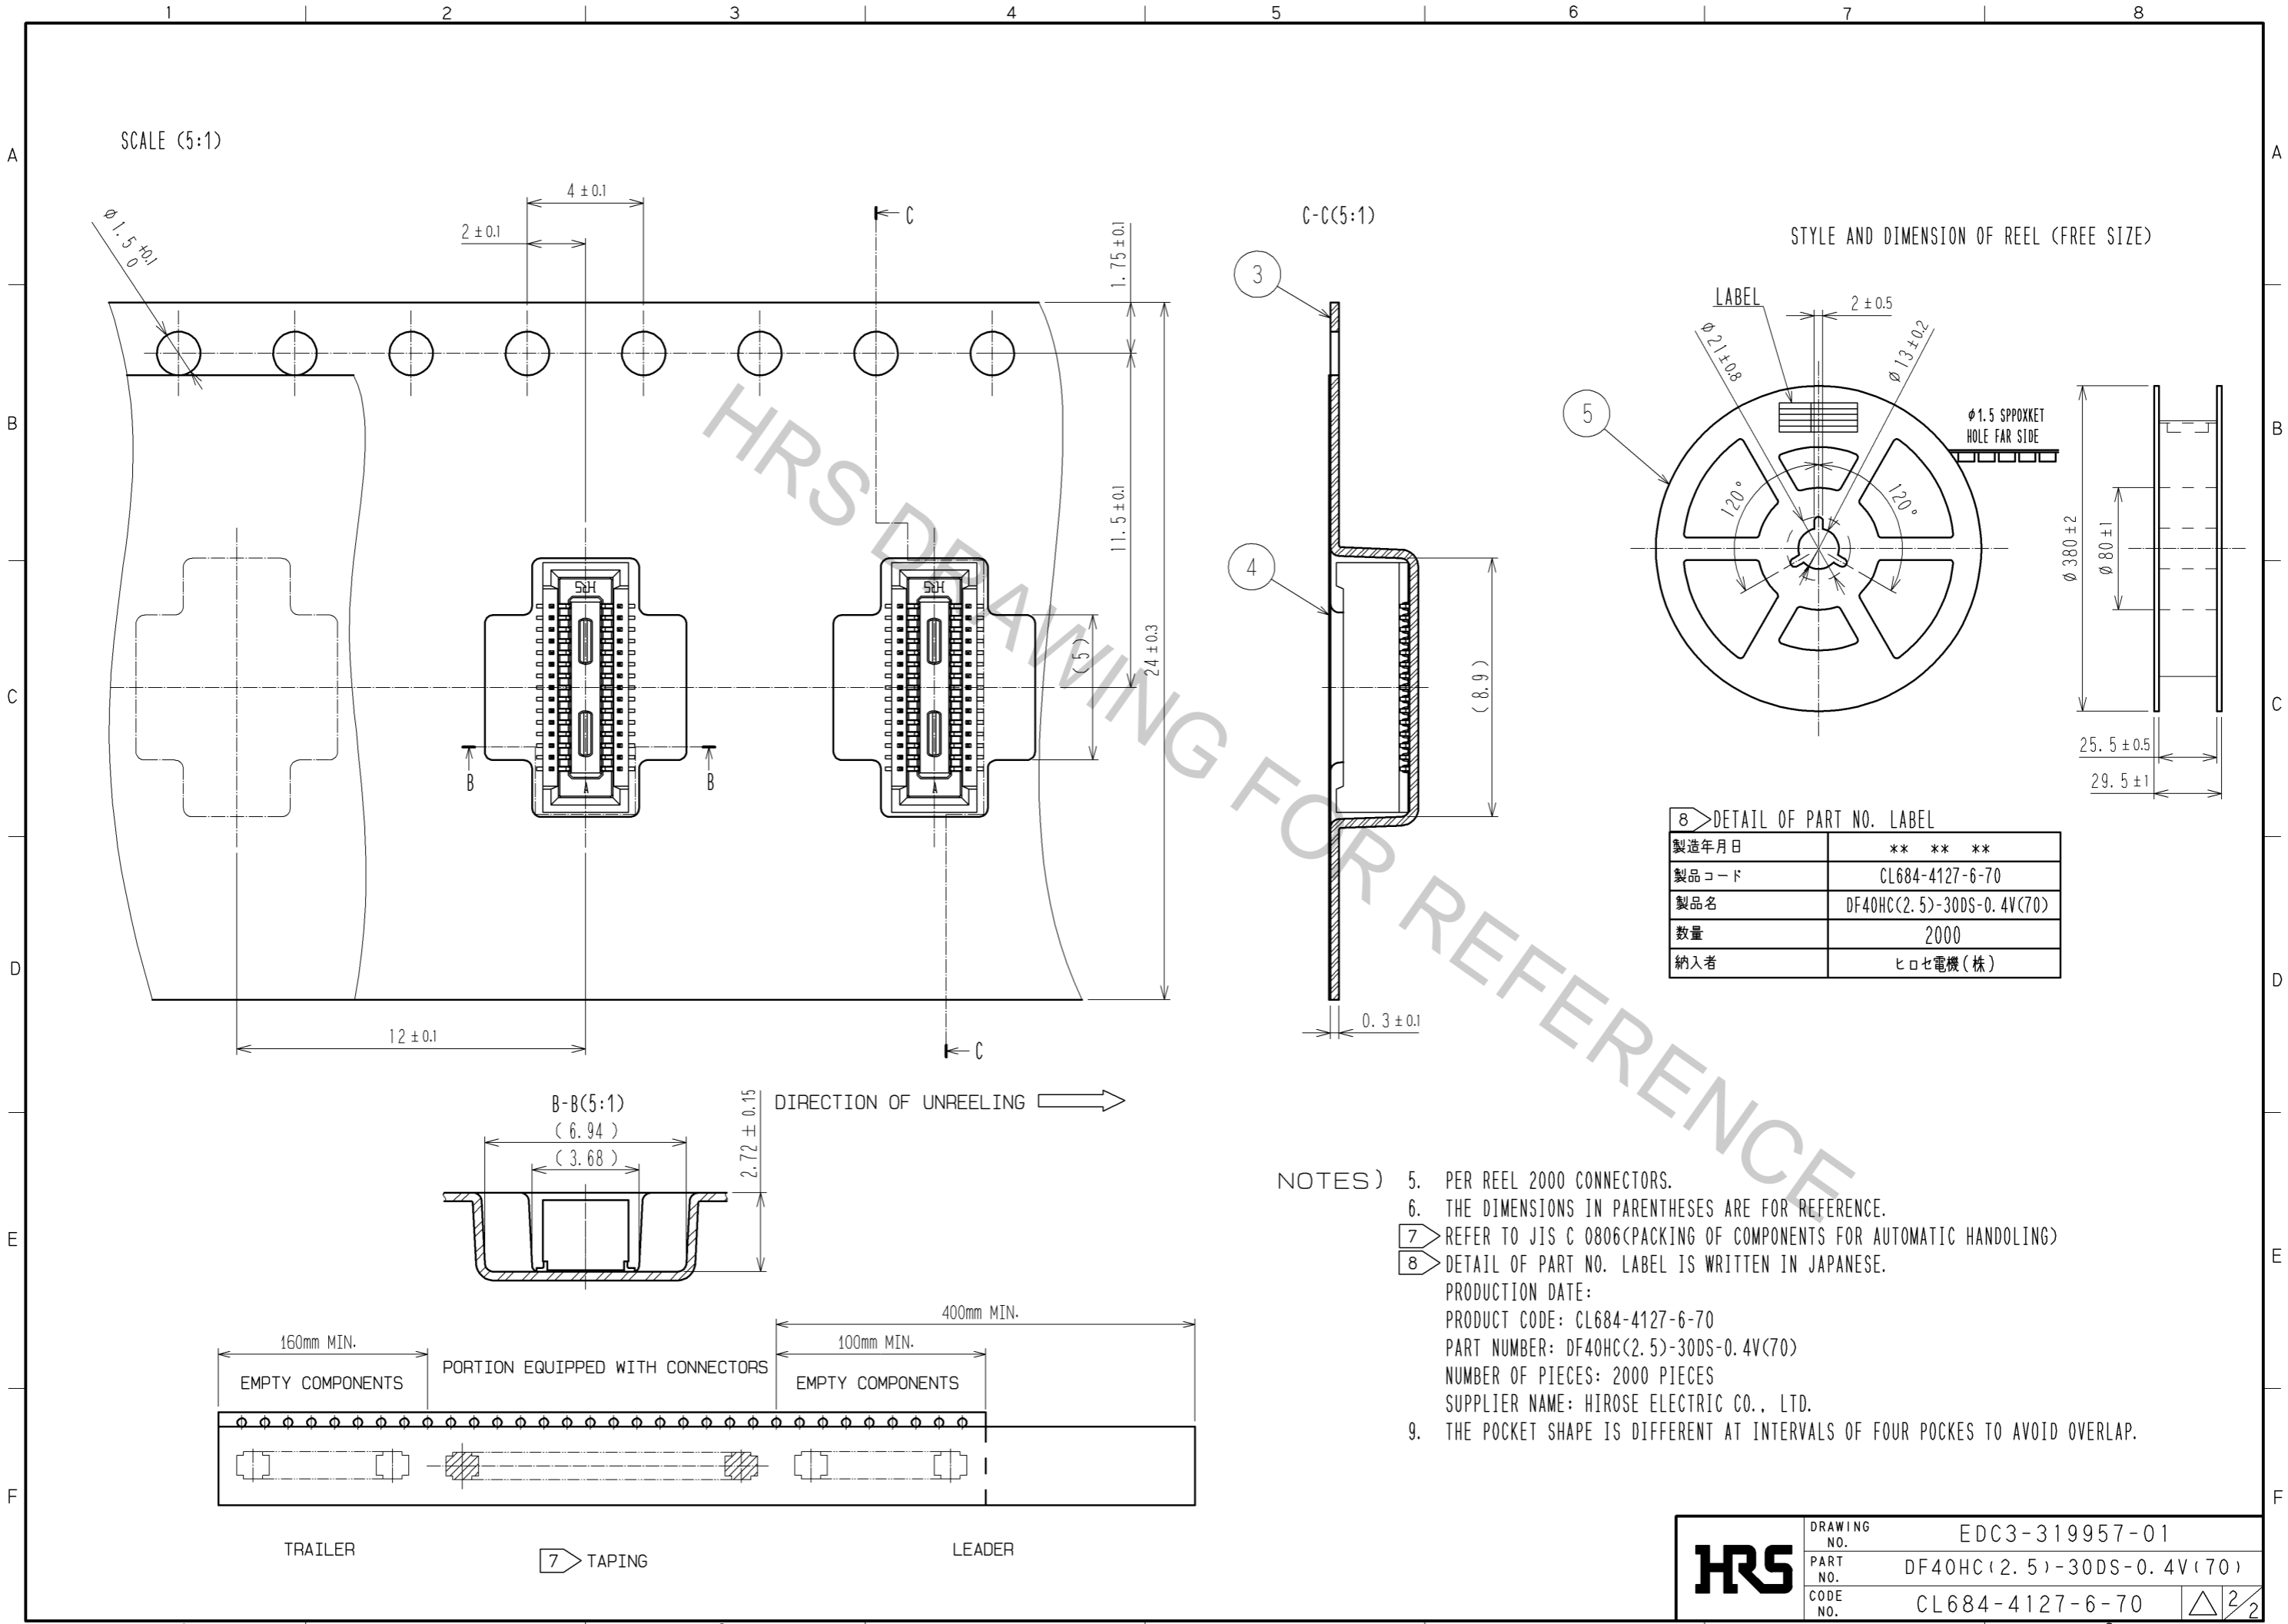

HRS	DRAWING NO.	EDC3-319957-01
	PART NO.	DF40HC(2.5)-30DS-0.4V(70)
	CODE NO.	CL684-4127-6-70
		\triangle 2/2